




CORPORATION

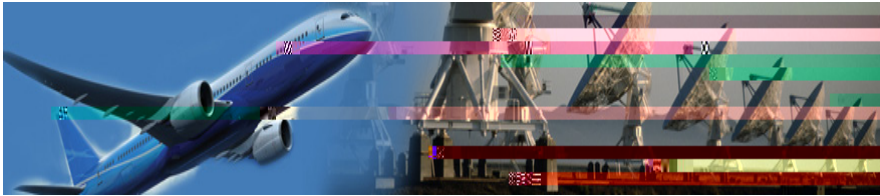


Its low dissipation factor extends the usefulness of RT/duroid 5870 and 5880 laminates to Ku-band and above.

RT/duroid 5870 and 5880 laminates are easily cut, sheared and machined to shape. They are resistant to all solvents and reagents, hot or cold, normally used in etching printed

may also be specified.

When ordering RT/duroid 5870 and 5880 laminates, it is important to specify dielectric thickness, tolerance, rolled, electrodeposited or reverse treated copper foil, and weight of copper foil required.

## Data Sheet

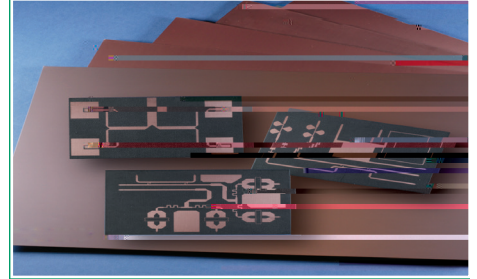

### Features:

### Some Typical Applications:

S		S		S C C		-S C C	
0.005" (0.127mm)	0.031" (0.787mm)	18" X 12" (457 X 305mm)		½ oz. (18µm) and 1 oz. (35µm)		¼ oz. (9 µm) electrodeposited copper foil	
0.010" (0.254mm)	0.062" (1.575mm)	18" X 24" (457 X 610mm)		electrodeposited and rolled copper foil		½ oz. (18µm), 1 oz. (35µm) and 2 oz. (70µm) reverse treat	
0.015" (0.381mm)		Non-standard sizes may be				copper foil	
0.020" (0.508mm)		available up to 18" X 48"				2 oz. (70µm) electrodeposited and rolled copper foil	
Non-standard thicknesses are available		(457 X 1219 mm)		Thick metal claddings may be available based on dielectric and plate thickness. Contact customer service for more information on available non-standard and custom thicknesses, claddings and panel sizes			

These commodities, technology and software are exported from the United States in accordance with the Export Administration regulations. Diversion contrary to U.S. law prohibited.

RT/duroid, Helping power, protect, connect our world and the Rogers' logo are trademarks of Rogers Corporation or one of its subsidiaries.

© 2018 Rogers Corporation, Printed in U.S.A. All rights reserved. Revised 1402 101518 #92-101

Helping power, protect, connect our world